


Office: 513.863.7265
 Toll-free: 844.RAM.PUMP
 4604 Old Kyles Station Rd.
 Hamilton, Ohio 45011-2328



Todd Morgan | President
 Mobile: 513.543.5825
 Fax: 513.863.6176
 tmorgan@ramcrete.com


38Z-Meter Boom

Outrigger Spread

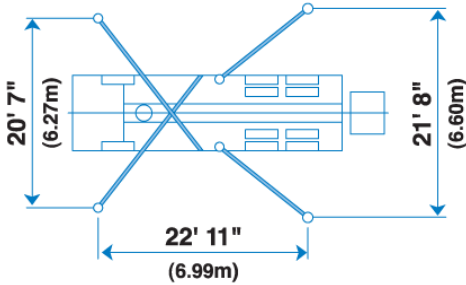

BOOM STYLE	
Boom Style	Multi-Z
Number of sections	4
HEIGHT & REACH	
Vertical reach	121' 9" (37.11m)
Horizontal reach	108' 7" (33.10m)
Reach from front of truck	101' 1" (30.81m)
Reach depth	80' 1" (24.41m)
Unfolding height	28' 7" (8.71m)
BOOM SECTION ARTICULATION	
1st section articulation	103°
2nd section articulation	180°
3rd section articulation	245°
4th section articulation	233°
BOOM SECTION LENGTH	
1st section length	28' 6" (8.69m)
2nd section length	25' 3" (7.70m)
3rd section length	27' 7" (8.41m)
4th section length	27' 3" (8.31m)
OUTRIGGERS	
Outrigger spread: L-R-front hydraulically extend out & down	20' 7" (6.27m)
Outrigger spread: L-R-rear hydraulically swing out & extend down	21' 8" (6.60m)
Outrigger load: Front	41,590 lbf (185 kN)
Outrigger load: Rear	43,840 lbf (195 kN)

Boom Chart

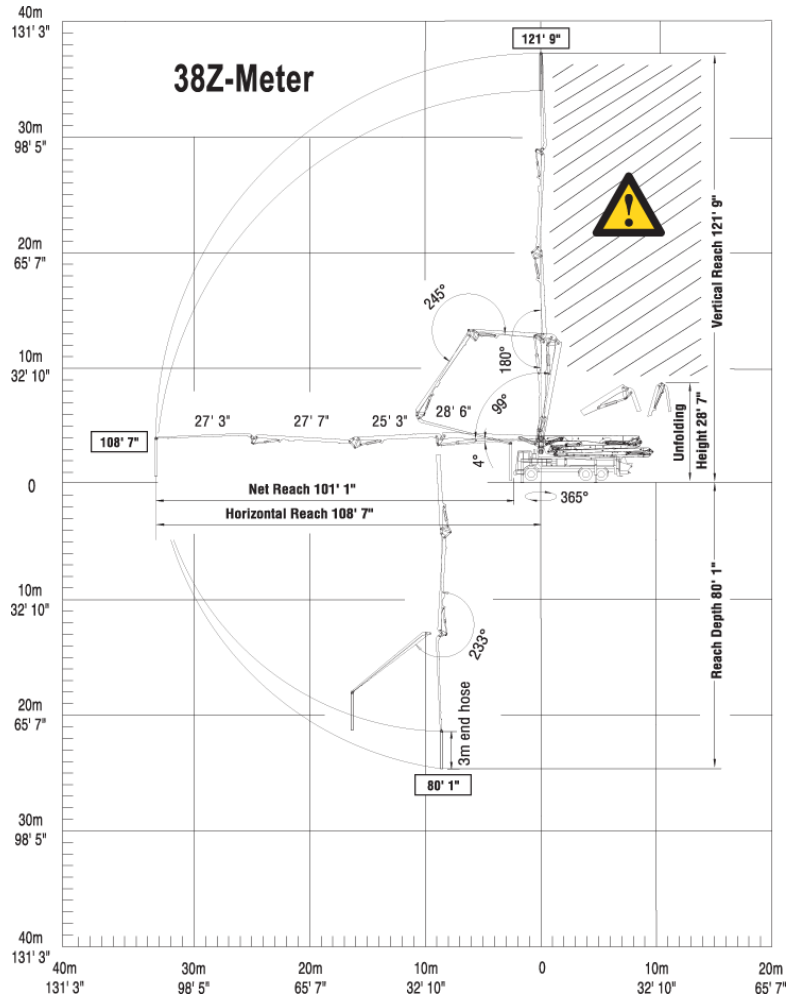

Truck Specs

