


Office: 513.863.7265
 Toll-free: 844.RAM.PUMP
 4604 Old Kyles Station Rd.
 Hamilton, Ohio 45011-2328



Todd Morgan | President
 Mobile: 513.543.5825
 Fax: 513.863.6176
 tmorgan@ramcrete.com

SP 8800

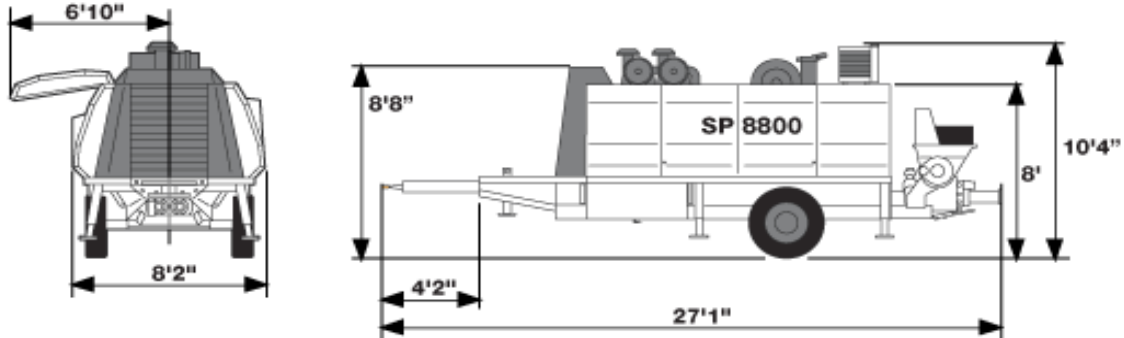

PUMP SPECS	2018-7 150/90	2020-7 150/90
Concrete Output Per Hour (Rod/Piston)	123/82 cu yds	152/101 cu yds
Maximum Pressure on Concrete (Rod/Piston)	1869/2920 psi	1508/2364 psi
Maximum Aggregate Size	2.5 in	2.5 in
Concrete Cylinder Diameter	7 in	8 in
Concrete Cylinder Stroke Length	79 in	79 in
Differential Piston/Rod Diameter	5.9 in	5.9 in
Outlet Diameter	-	-
Concrete Valve Type	High Pressure Rock Valve w/ Double Shift Cylinders	
Shifting Cylinders	2	2
Max. Pump Strokes Per Minute (Rod/Piston)	31/21	31/21
Volume Control	0 to Maximum	0 to Maximum
Hydraulic System	Open Loop	Open Loop
Main Hydraulic Pump	-	-
Hydraulic Pressure (Rod/Piston)	1869/2920 psi	1827/2857 psi
Hydraulic Tank Capacity	-	-

PUMP SPECS	2018-7 150/90	2020-7 150/90
Engine Model- Diesel Tier 3	TCD 2015 V08 2100RPM	CAT® C13 2100RPM
Diesel Engine Power	590 hp	442 hp
Fuel Tank Capacity	170 gal	170 gal
Hopper Capacity	21.2 cu ft	21.2 cu ft
Hopper-Height	61 in	61 in
Axle	Single Axle Job Site Only	Single Axle Job Site Only
Axle Capacity Rating	-	-
Tires	-	-
Brakes	N/A	N/A
Outrigger Legs	Hydraulic	Hydraulic
Length	25'9"	25'9"
Width	7'7"	7'7"
Height	9'10"	9'10"
Trailer Units Weight	22,000 lbs	22,000 lbs